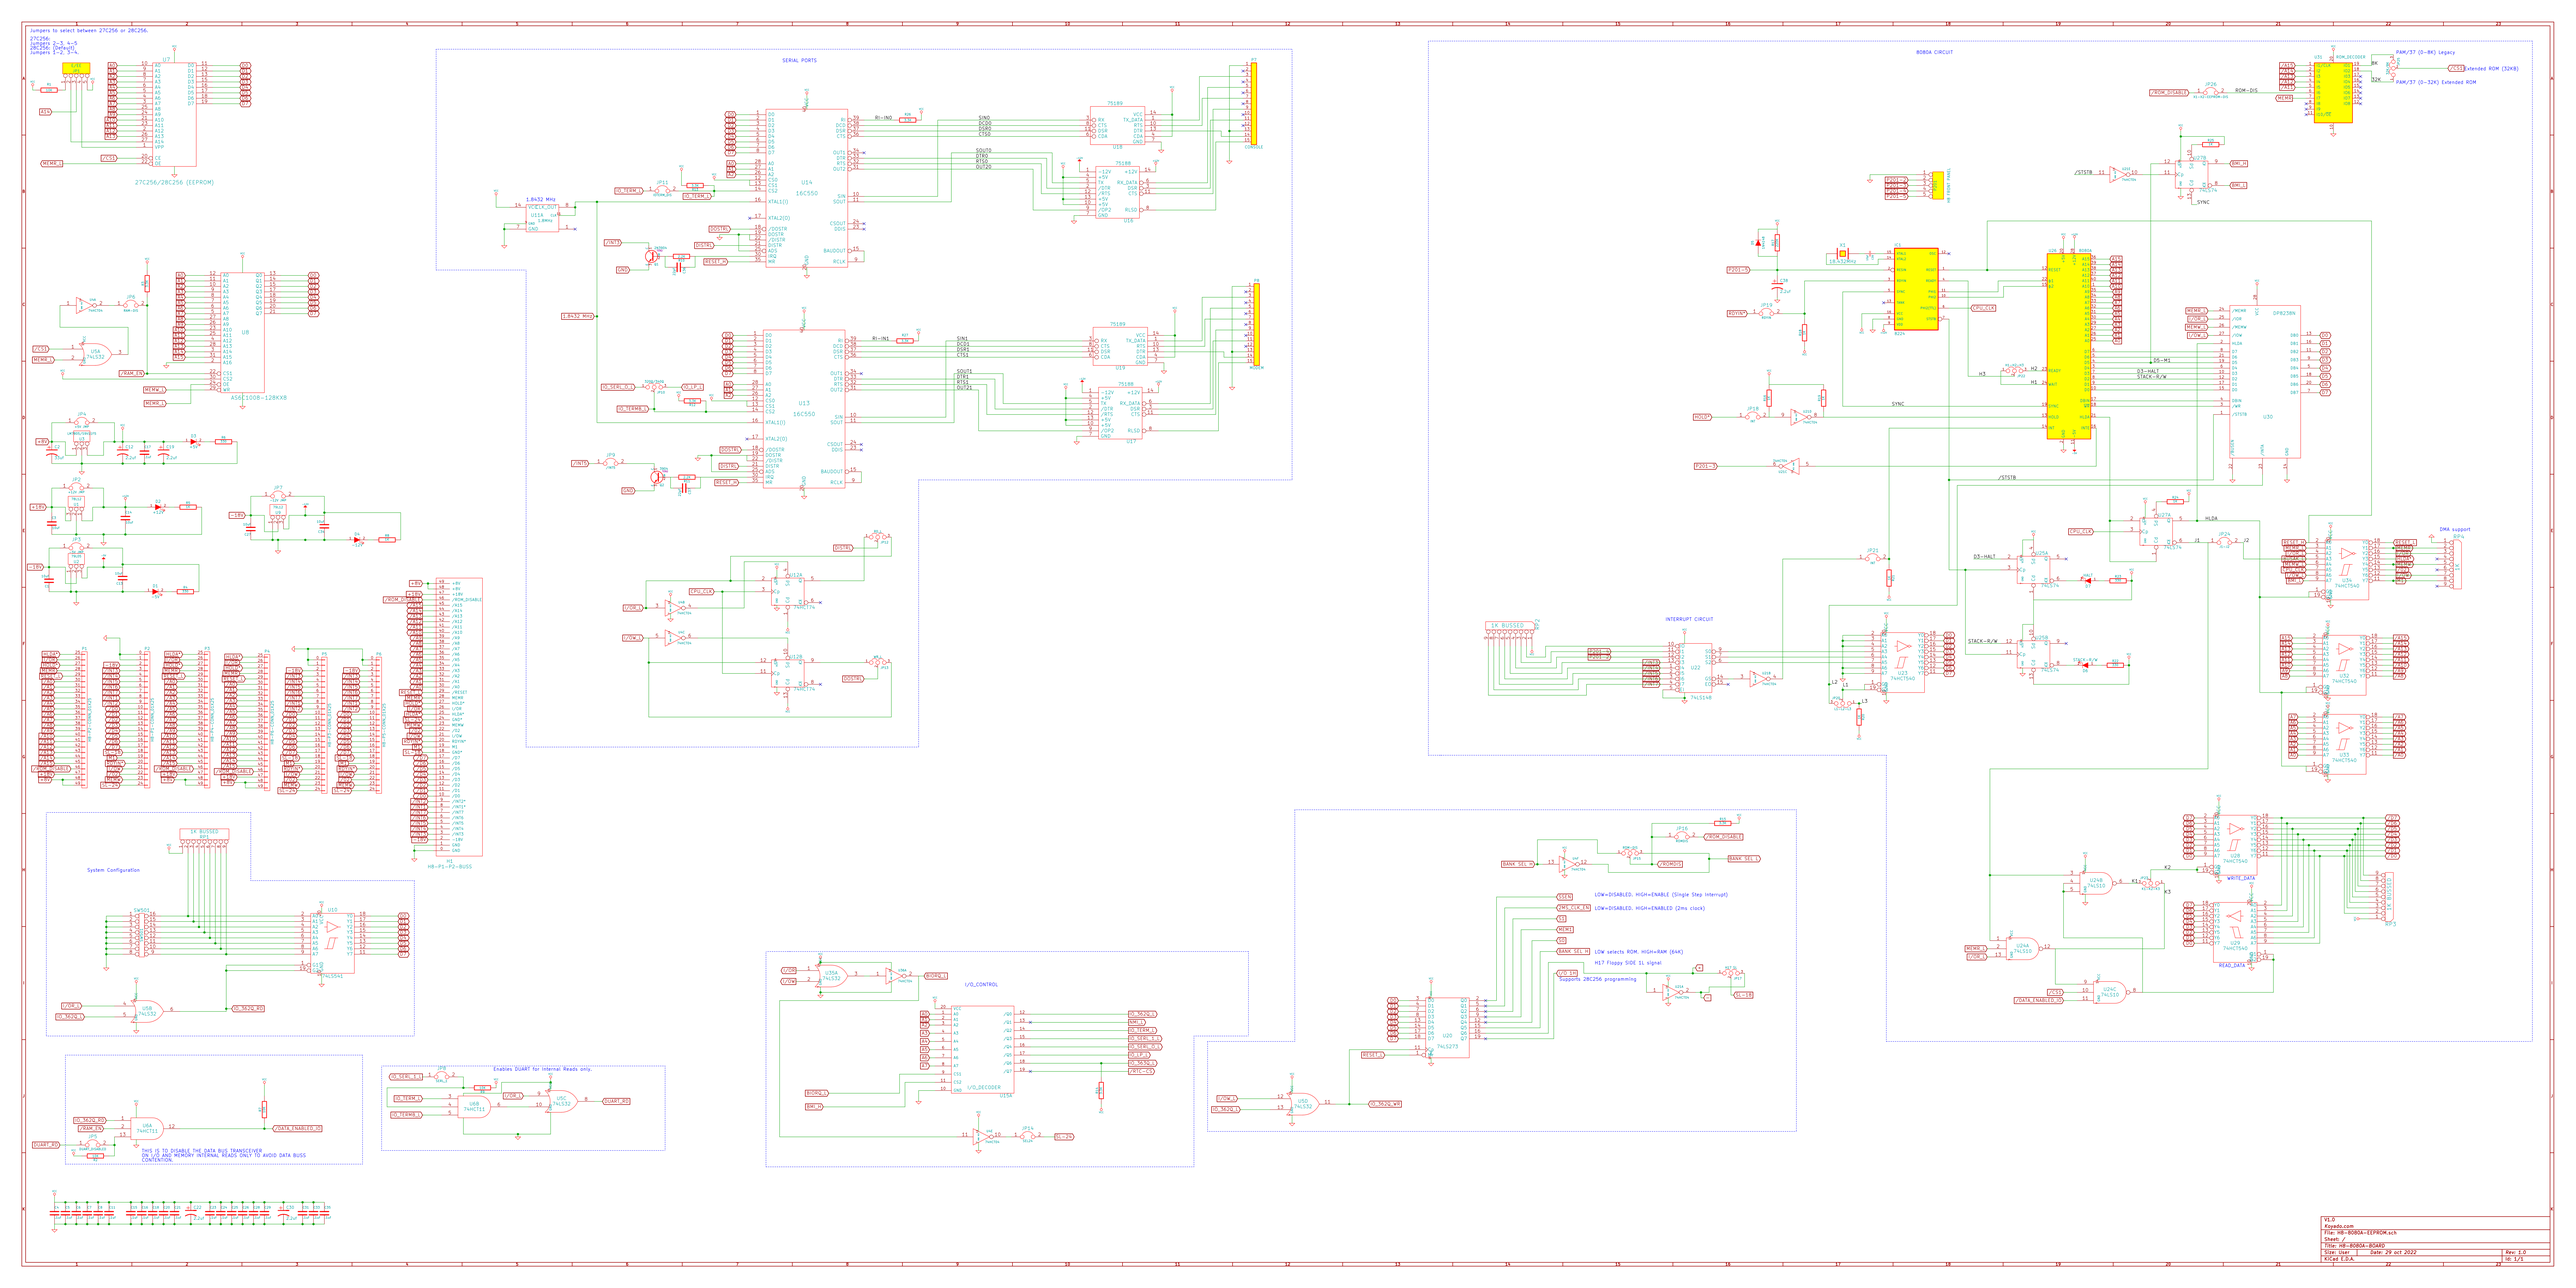
Jumpers to select between 27C256 or 28C256.
27C256:
Jumpers 2-3, 4-5
Jumpers 1-2, 5-6
Jumpers 1-2, 5-6.
27C256/28C256 (EEPROM)
SERIAL PORTS
16C550
75189
75188
1.8432 MHz
BOBOA CIRCUIT
INTERRUPT CIRCUIT
System Configuration
I/O_CONTROL
Enables UART for internal Reads only.
HB-PS-P2-BUSS
DMA support
PAM/37 (0-8K) Legacy
PAM/37 (0-32K) Extended ROM
Extended ROM (32KB)
SYNC
WRITE_DATA
READ_DATA
/STSTB
HLDA
/DS-HALT
STACK-R/W
/DS-M1
/ROM_DISABLE
/ROM_ENABLED_IO
/UART_RD
/UART_WR
/IOW_A
/IOR_A
/IOW_B
/IOR_B
/IOW_D
/IOR_D
/IOW_C
/IOR_C
/IOW_E
/IOR_E
/IOW_F
/IOR_F
/IOW_G
/IOR_G
/IOW_H
/IOR_H
/IOW_I
/IOR_I
/IOW_J
/IOR_J
/IOW_K
/IOR_K
/IOW_L
/IOR_L
/IOW_M
/IOR_M
/IOW_N
/IOR_N
/IOW_O
/IOR_O
/IOW_P
/IOR_P
/IOW_Q
/IOR_Q
/IOW_R
/IOR_R
/IOW_S
/IOR_S
/IOW_T
/IOR_T
/IOW_U
/IOR_U
/IOW_V
/IOR_V
/IOW_W
/IOR_W
/IOW_X
/IOR_X
/IOW_Y
/IOR_Y
/IOW_Z
/IOR_Z
/IOW_0
/IOR_0
/IOW_1
/IOR_1
/IOW_2
/IOR_2
/IOW_3
/IOR_3
/IOW_4
/IOR_4
/IOW_5
/IOR_5
/IOW_6
/IOR_6
/IOW_7
/IOR_7
/IOW_8
/IOR_8
/IOW_9
/IOR_9
/IOW_10
/IOR_10
/IOW_11
/IOR_11
/IOW_12
/IOR_12
/IOW_13
/IOR_13
/IOW_14
/IOR_14
/IOW_15
/IOR_15
/IOW_16
/IOR_16
/IOW_17
/IOR_17
/IOW_18
/IOR_18
/IOW_19
/IOR_19